



CS2000AH

Hall-effect Current Sensor Series


Open loop current sensor based on the principle of Hall-effect. It can be used for measuring AC,DC,pulsed and mixed current.



Electrical characteristics

	Type	CS200AH	CS500AH	CS800AH	CS1000AH	CS1500AH	CS2000AH	
I_{PN}	Primary nominal input current	200	500	800	1000	1500	2000	A
I_P	Measuring range of primary current	0~±400	0~±1000	0~±1600	0~±2000	0~±2500	0~±3000	A
V_{OUT}	Nominal output voltage	4±1%						V
V_C	Supply voltage	±12~±15(±5%)						V
I_C	Current consumption	$V_C=±15V$ <25						mA
V_D	Insulation voltage	AC/50Hz/1min 5						kV
ϵ_L	Linearity	<1						%FS
V_O	Offset voltage	$T_A=25^{\circ}C$ <±25						mV
V_{OM}	Residual voltage	$I_{PN} \rightarrow 0$ <±25						mV
V_{OT}	Thermal drift of V_O	$I_P=0$ $T_A=-25 \sim +85^{\circ}C$ <±1						mV/°C
T_R	Response time	≤7						μs
f	Frequency bandwidth(-3dB)	DC~20						kHz
T_A	Ambient operating temperature	-25~+85						°C
T_S	Ambient storage temperature	-40~+100						°C
R_L	Load resistance	≥10						KΩ
m	Mass	330						g
	Standard	Q/320115QHKJ01-2016						

Dimensions of drawing (mm)

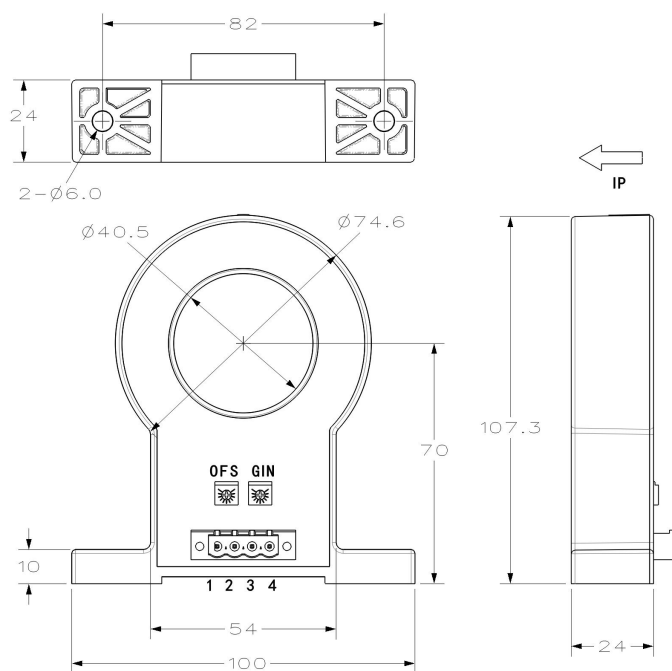

Elucidation: 1:+15V 2:-15V 3: V_{OUT} 4:0V(GND) OFS:Zero adjustment GIN:Gain adjustment
(Red:+15V Blue:-15V Yellow: V_{OUT} Black:0V)

Remarks

- Incorrect connection may lead to the damage of the sensor.
- V_{OUT} is positive when the I_P flows in the direction of the arrow.